

3 Half Height Device Bay,  
Single Power Supply, Ultra-Low Profile 2-U Rackmount Enclosure

With Support for:

- SCSI Narrow/Ultra-Wide Single Ended/Ultra-Wide Differential
- SCSI Ultra II LVD
- SCSI Ultra III LVD
- Fibre
- Network Attached Storage

*HIGH CAPACITY &  
ULTRA LOW PROFILE*



Note: Shown With  
Optional Drive Trays

- Mounts up to Three 5.25 Inch Half-Height Devices (3.5 Inch Drives) With Support for Hard Drives, CD Drives, Optical Disks, DAT and Tape Drives
- Available in Narrow and Ultra Wide SCSI as well as Low Voltage Differential (LVD)
- Fits Standard 19-inch RETMA Rackmounts
- Drive Security Provided by Individual Keylocked Drive Trays
- Quality All-Metal Construction and Agency Approved Components Ensure Compliance with UL, CSA, TUV and FCC Standards
- Flexibility in Configuration Options Include Choice of Drive Trays, a Variety of Cables and Connectors, and Custom Painting to Match any Product, System or Facility Decor
- Easy Access Design Allows for Quick and Easy Replacement of all Internal and External Components
- Ultra Low Profile Design Maximizes Rack Space
- RJ45 Ethernet Connector Available
- Rackmount Slide Kit & Desktop Conversion Kits Optional

Manufactured By:

**Caen Engineering, Inc.**

2130 N. Glassell St, • Orange, CA 92865, USA  
Phone: (714) 998-6300 • Fax: (714) 998-6366  
www.caeneng.com • Email: sales@caeneng.com

## ELECTRICAL

### AC Input Power

Voltage	115/230 VAC ± 15% (Auto Switching)
Frequency	47 to 63Hz
Protection	5A/250V Fuse

### DC Output Power

Continuous	200W
+5VDC	20A
+12VDC	8A

## ENVIRONMENTAL

### Temperature

Operating	0 to 50° C
Storage	-25 to 85° C

### Humidity

0 to 95%
Non-Condensing

### Altitude

Operating	0 to 10,000 Feet
Storage	0 to 30,000 Feet

## PHYSICAL

### Installation

Rackmount, Table Top

### Dimensions

19in. w x 15in. d x3.5in. h

### Weight

35lbs Unpopulated

## CONFIGURATION

### Trays

Supports up Three 5.25in. Half-Heigh Devices

### Power Supplies

One 200W Power Supply

### RAID Controllers

Supports 5.25in. Half-Height Form Factor

## CONNECTOR LOCATIONS

### Standard

Four SCSI II/III

## COOLING

Two 12VDC, 27CFM Fans Provide Front to Rear Cooling

## ACCESS

### Peripherals

Keylock Protected Quick-Disconnect Trays, Hot-Swappable

### Cabling

Through Easy to Remove Top Cover


## ACTIVITY INDICATORS

### Drives


Amber LED on Front of Each Drive Tray

## ADDITIONAL OPTIONS

OEM Logo Silkscreening  
 Rackmount Slide Kit  
 Tabletop Conversion Kit  
 RJ45 Connector  
 Telco DC -48V Power Supply

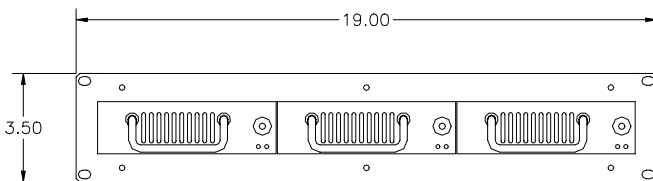

Drive Tray Locations  
**FRONT VIEW**



**REAR VIEW**

## Caen Engineering, Inc.

2130 N. Glassell St, • Orange, CA 92865, USA  
 Phone: (714) 998-6300 • Fax: (714) 998-6366  
 www.caeneng.com • Email: sales@caeneng.com